

Styling and performance to the MAX!

MAX-VAC II is the ultimate self-service vacuum. And it's from Dilling-Harris of course.

★ **Rugged construction**

Lifetime warranty (not pro-rated) on stainless steel vacuum hull.

★ **Extra filtering capacity**


★ **Easy to service**



Often Copied, Never Equaled.



Great styling with lighted dome available in 5 colors

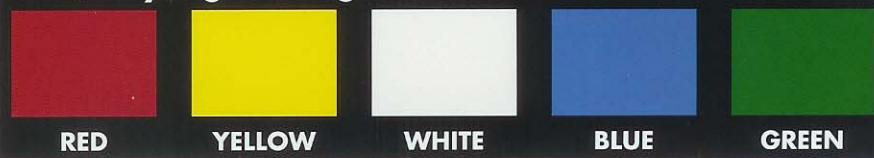

MAX-VAC II SPECIFICATIONS AND FEATURES

ELECTRICAL VACUUM MOTORS

Two Lamb Model 116757-13 motor/ fan units (quiet)

Type: Two stage, single speed, bypass, 5.7" dia., double ball bearings

Maximum electrical input at 120 VACm 16A

Motor operating speed range: 17650 - 22450 RPM

Performance (per motor manufacturer):
94 CFM each motor,
250 CFM total with 2" orifice
84 inches of water lift (max.)

TIMERS

Solid state token/quarter

LIGHTING (STANDARD)

Soft glow lighted dome standard equipment

CONNECTIONS

Requires 20 amp single branch service, 120 VAC

FILTERS

Six tube-type filters 3240 sq. in total area
Napped synthetic fabric with double sewn seams for maximum strength

MOUNTING

Four internal holes for 3/8" anchor bolts

SIZE/WEIGHT

Unit (complete): 35"D x 19"W x 61"H

Weight (shipping) 230 lbs

HOSE

15' x 2" inside diameter all plastic hose with Dilling-Harris swivel, metal nozzle

STRUCTURE

Tank sides and tank ends:
14 ga. stainless steel

Meter/coinbox & coin vault door:
11 ga. stainless steel

Hose channel:
18 ga. stainless steel

OPTIONS

Single phase, 220 V. 50 HZ

3rd vacuum motor

Dollar bill acceptor



Standard door shown.



High performance 2-stage motors come as standard equipment.



Internal mounting system makes unit more secure from theft or vandalism. All seams fully welded.



Solid state controls are utilized



Often Copied, Never Equaled.

10215 Miller Road, Dallas, Texas 75238
PHONE 1-800-727-4122 • 214-348-2662 • FAX 214-348-2914
E-mail: info@dilling-harris.com • www.dilling-harris.com